



PROOFING CABINET ON WHEELS STAINLESS STEEL MODEL - mod. CAB-T



DATA SHEET

REV. 1.4 – TECHNICAL OFFICE – 06.2021

General features


- Panels thermally insulated with 60mm polyurethane foam
- External structure in AISI 304 stainless steel
- Tray supports in AISI 304 stainless steel
- Suitable for Euronorm trays type 40X60 or 45X65
- Base in AISI 304 stainless steel
- Magnetic gasket
- Closure assisted by zipper with spring action
- Air flow along the walls
- Stainless steel door with AISI 304 stainless steel handle

Air handling units

- Humidification with immersed resistance INCOLOY800
- Heating with dedicated INCOLOY800 resistance
- Relative humidity between 40% and 95%
- Temperature up to +45 ° C
- IP44 enhanced aluminum fan

Temperature and humidity control

- Electronic control above the door
- Temperature and humidity electronically managed with room probes
- Management via control board with microprocessor
- Alarm with acoustic signal

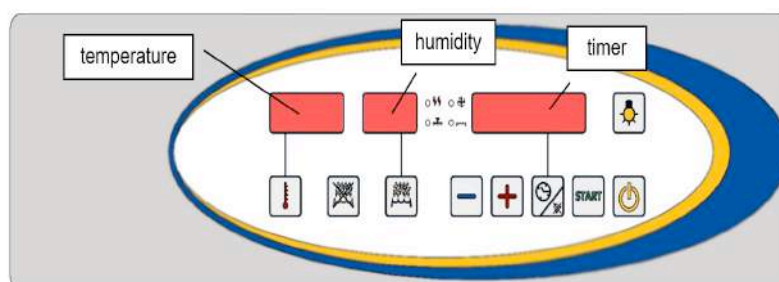

User interface



Trays capacity

- 20 possible positions, minimum pitch 80mm 40X60 or 45X65
- Standard equipment 20 pairs of corner pieces

Technical details

- Maximum power absorbed in operation 2.5KW
- Water inlet with washing machine type connection
- 220V single-phase power supply with traditional socket
- Electricity and water connection above the sky

External overall dimensions

- Model for 40X60 or 45X65 trays: 710X810 H2150mm

Shipping dimensions

- Pallet and carton external dimensions: 740X850 H2300mm, weight 145kg
- Shipping dimension in crate: 940x850 H2330mm, weight 190kg

