



## **PROOFING CABINET ON WHEELS ALUMINIUM MODEL WITH STEAMER AND HEATER**



DATA SHEET

REV. 2.1 – TECHNICAL OFFICE – 06.2018

M.C.E Meccanica S.r.l. - Strada della Genovese 39 - 37135 VERONA - ITALY  
VAT: IT03314870233  
VIES: IT03314870233

Tel. +39 045 66617 44  
Fax +39 045 66687 63

[www.mce-meccanica.com](http://www.mce-meccanica.com)  
[info@mce-meccanica.com](mailto:info@mce-meccanica.com)  
[ufficiotecnico@mce-meccanica.com](mailto:ufficiotecnico@mce-meccanica.com)



## **GENERAL FEATURES**


- 40mm polyurethane isothermal insulating panels
- White pre-painted tubular aluminum structure
- Trays supports in AISI 304 stainless steel
- Suitable for Euronorm trays type 40x60 or 60x80
- Base in AISI 304 stainless steel
- Assisted closing with piston system
- Air flow along the walls
- Handle integrated in the doors for reduced dimensions

## **AIR HANDLING UNITS**

- Chassis in AISI 304 stainless steel
- Humidification with immersed resistance INCOLOY800
- Heating with dedicated resistance INCOLOY800
- Relative humidity between 30% and 95%
- Temperature up to +45 ° C
- IP44 enhanced aluminum fan

## **ELETRONIC CONTROL PANEL**

- Control panel above the door
- Electronically managed temperature and humidity
- Possibility of weekly programmed ignition
- Up to 8 leavening timers
- Alarm with acoustic signal for product ready

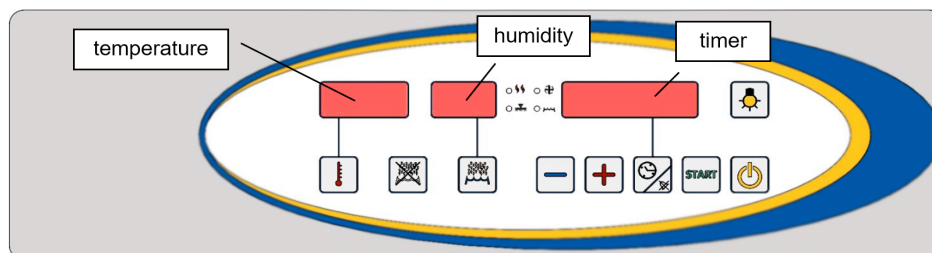

User interface



### **TRAYS CAPACITY**

- 20 possible positions, minimum pitch 80mm for 40x60-50x70-60x80 trays
- Standard equipment 20 pairs of corner pieces

### **TECHNICAL DETAILS**

- Maximum absorbed power 2.5 Kw
- Water inlet with washing machine type connection
- 220v single-phase power supply with traditional socket
- Electric and water connection above the sky

### **EXTERNAL OVERALL DIMENSIONS**

- Model for 40x60 trays: 530x880 H2180mm
- Model for 50x70 trays: 630x980 H2180mm
- Model for 60x80 trays: 730x1080 H2180mm

